


## GEN2 – BOOT DELETE INSTALLATION guidance.

1. Remove the gear knob by pulling straight up and off the shift lever. (The knob can be on quite tight and may need a lot of force to remove it.)



2. Locate and remove the 3 torx 20 bolts 2 in the cup holders and 1 on the rear cup holder.

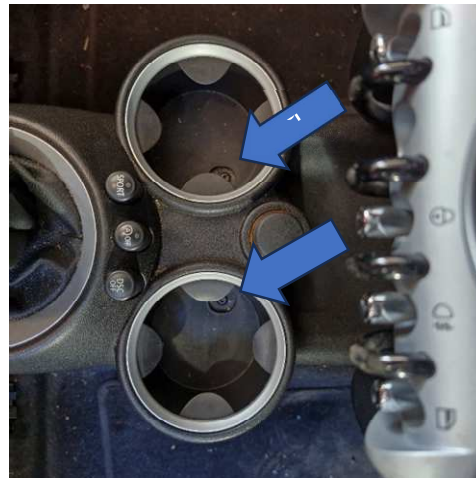

3. Gently lift the handbrake boot assembly from the Rear and lift up and out over the handbrake handle.
4. Disconnect the electrical connector on the cigarette lighter.
5. Push the clips and remove the leather gaiter.

6. Now you are ready to fit the spring and on top of that the disc.



7. Lastly you can fit the main body of the part.

8. Then you need to apply the tape as shown in the photos (one in the front one in the back).





Well done!! The installation is completed.